


Product Brief

Mobile Intel® 945GSE Express Chipset

Embedded Computing



Mobile Intel® 945GSE Express Chipset for Embedded Computing

Product Overview

The Mobile Intel® 945GSE Express chipset provides power-efficient graphics and rich I/O capabilities for cost-effective embedded solutions. It features an integrated 32-bit 3D graphics engine based on Intel® Graphics Media Accelerator 950 (Intel® GMA 950) architecture, a 533 MHz front-side bus (FSB), single-channel 400/533 MHz DDR2 system memory (SODIMM and/or memory down), and Intel® High Definition Audio¹ interface.

The chipset consists of the Intel® 82945GSE Graphics Memory Controller Hub (GMCH) and Intel® I/O Controller Hub 7-M (ICH7-M). It delivers outstanding system performance and flexibility through high-bandwidth interfaces such as PCI Express*, PCI, Serial ATA, and Hi-Speed USB 2.0 connectivity.


Designed for and validated with the Intel® Atom™ processor N270^A on 45nm process technology, this platform offers an excellent solution for embedded market segments such as digital signage, interactive clients (kiosks, point-of-sale terminals), thin clients, digital security, residential gateways, print imaging, and commercial and industrial control. It is part of Intel's comprehensive validation process, enabling fast deployment of next-generation platforms to help developers maximize competitive advantage while minimizing development risks.

Product Highlights

- 533 MHz FSB delivers high-bandwidth connection between the processor and chipset
- Single-channel non-ECC 400/533 MHz DDR2 provides up to 2 GB (using a combination of SODIMM and memory down) of high-speed system memory for greater platform performance
- Integrated 3D graphics engine, based on Intel® GMA 950 architecture, delivers sophisticated graphics for large display applications
- Dual independent display support, at graphics core speeds up to 166 MHz, provides a wealth of options for high-resolution displays
- Graphics interfaces such as single-channel SDVO, VGA, dual-channel LVDS and analog TV-out, support multiple graphics display options
- Direct Media Interface (DMI) chip interconnect can be implemented at x2 width and provides up to 500 MB/s in each direction in full duplex
- Four UHCI host controllers and one EHCI host controller enable support for up to eight USB 2.0 ports, providing high-performance peripherals with 480 Mb/s of bandwidth per port
- Up to four PCI Express ports, configurable as one single x4 or four single x1 ports
- Up to six PCI bus masters provide support for legacy devices
- Intel High Definition Audio interface for full surround sound
- LAN Connect Interface (LCI) enables flexible network solutions such as 10/100 Mb/s Ethernet and 10/100 Mb/s Ethernet with LAN manageability
- Integrated Serial ATA host controller supports two ports and data transfers up to 150 MB/s
- Intel® Active Management Technology,² when used with the Intel® 82573E Gigabit Ethernet Controller, supports high-quality asset management capabilities such as remote management of unmanned sites
- Supported by the Intel® Embedded Graphics Drivers and video BIOS developed specifically for embedded products and applications (developer.intel.com/design/intarch/Swsup/graphics_drivers.htm)

Product Highlights (continued)

- Advanced packaging technology and industry-leading electrical design innovations deliver long-term system reliability over a broad spectrum of operating conditions
- Embedded lifecycle support enables extended product availability for embedded and communications customers, protecting system investment
- Along with a strong ecosystem of hardware and software vendors, including members of the Intel® Embedded and Communications Alliance (intel.com/go/eca), Intel helps developers cost-effectively meet design challenges and speed time-to-market

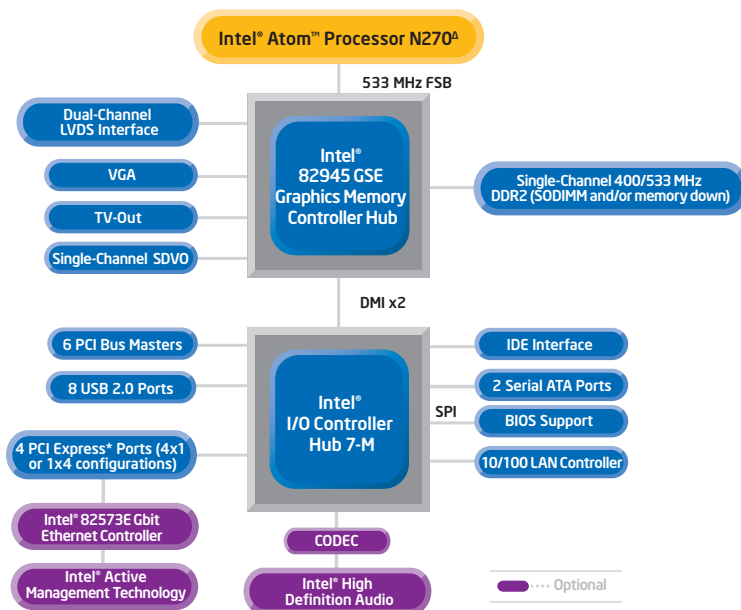

Mobile Intel® 945GSE Express Chipset for Embedded Computing

Product	Product Code	Package	Features
Intel® 82945GSE Graphics Memory Controller Hub	QG82945GSE	998 µFC-BGA	533 MHz front-side bus; Up to 2 GB of 400/533 MHz DDR2 system memory (SODIMM and/or memory down); Intel® GMA 950
Intel® I/O Controller Hub 7-M (ICH7-M)	NH82801GBM	652 µ-BGA	Direct connection to GMCH via Direct Media Interface; Four PCI Express root ports; Two-port Serial ATA controller; Up to eight USB 2.0 ports; Intel® High Definition Audio ¹ interface; PCI; IDE; LCI

Intel in Embedded and Communications: intel.com/go/embedded

^A Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families. See http://www.intel.com/products/processor_number for details.

¹ Intel® High Definition Audio requires a system with an appropriate Intel chipset and a motherboard with an appropriate codec and the necessary drivers installed. System sound quality will vary depending on actual implementation, controller, codec, drivers and speakers. For more information about Intel® HD audio, refer to <http://www.intel.com/>.

² Intel® Active Management Technology requires the platform to have an Intel® AMT-enabled chipset, network hardware and software, as well as connection with a power source and a corporate network connection. With regard to notebooks, Intel AMT may not be available or certain capabilities may be limited over a host OS-based VPN or when connecting wirelessly, on battery power, sleeping, hibernating or powered off. For more information, see <http://www.intel.com/technology/iamt>.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. UNLESS OTHERWISE AGREED IN WRITING BY INTEL, THE INTEL PRODUCTS ARE NOT DESIGNED NOR INTENDED FOR ANY APPLICATION IN WHICH THE FAILURE OF THE INTEL PRODUCT COULD CREATE A SITUATION WHERE PERSONAL INJURY OR DEATH MAY OCCUR.

Intel may make changes to specifications and product descriptions at any time, without notice. Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined." Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them. The information here is subject to change without notice. Do not finalize a design with this information. The products described in this document may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request. Contact your local Intel sales office or your distributor to obtain the latest specifications and before placing your product order. Copies of documents which have an order number and are referenced in this document, or other Intel literature, may be obtained by calling 1-800-548-4725, or by visiting Intel's Web Site www.intel.com/.

Intel, the Intel logo, and Atom are trademarks of Intel Corporation in the U.S. and other countries.

Copyright © 2008 Intel Corporation. All rights reserved.

*Other names and brands may be claimed as the property of others.

