




(2,00 mm) .0787"

TCMD SERIES

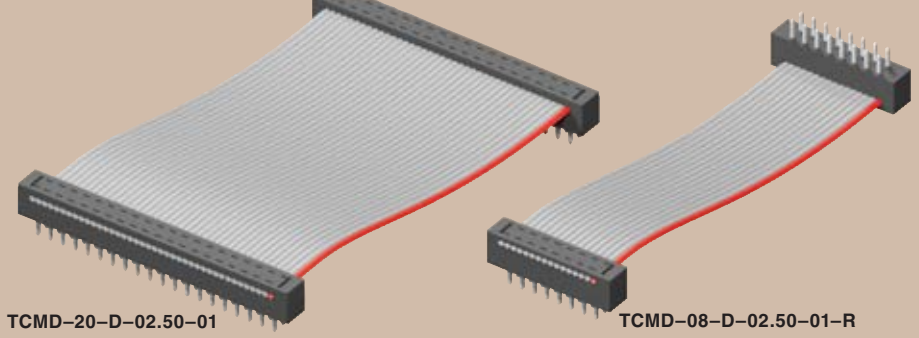

HIGH RELIABILITY IDC HEADER CABLE

Mates with:
SMM*, MMS*

SPECIFICATIONS

For complete specifications see www.samtec.com?TCMD

Insulator Material:
Black Glass Filled Polyester



Terminal:
Phosphor Bronze
Plating:
Au or Sn over 50µ" (1,27 µm) Ni

Wire:
28 AWG 7/36 Stranded, Tinned, Copper with Gray PVC Insulator

Current Rating:
1A per contact
Operating Temp Range:
-40°C to +105°C











RoHS Compliant:
Yes

TYPE STRIP — NO. PINS PER ROW — END OPTION — OVERALL LENGTH — 01 — TRANSFER OPTION — OTHER OPTION

-05, -08, -10, -12, -13, -15, -17, -20, -22, -25
(Call for other sizes)

- "XX.XX"
= Assembled Length
Assembled Length in INCHES (±1/8")
2 inches minimum

Leave blank for -S and -D End Options. For -T End Option Specify "-N" (Socket has notch polarization)

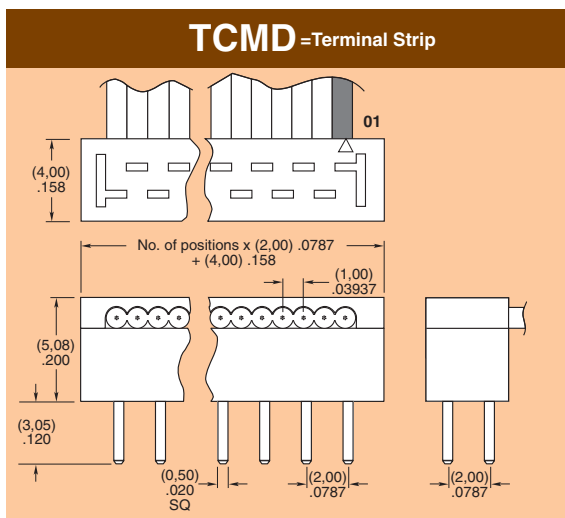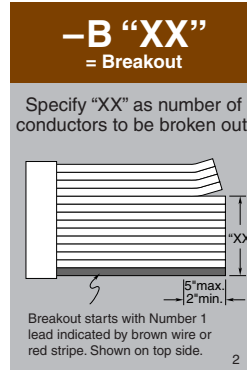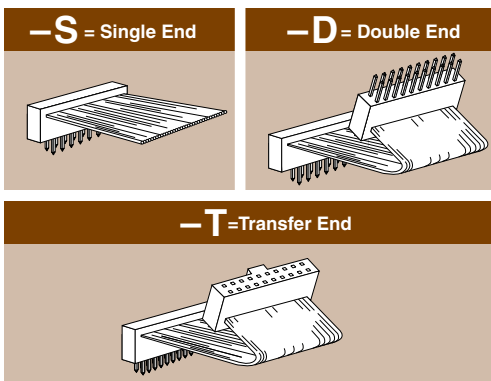

*Note: Standard TCMD callout will not mate with SMM, MMS. Must use gold plated callouts. (See drawing on web.) When mated with a socket, Wire 1 mates with Pin 2; Wire 2 mates with Pin 1, etc.

Note: TCMD Series assemblies are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM